

POSEIDON LINEAR LED TUBE

3 Pin Connector



TECHNICAL PARAMETERS

Series	Watt	Lumens	Amps (120V)	Amps (277V)	Voltage	Color Temp
Poseidon 4 FT	58W	7,500	0.67	0.31	100-277V	4000K 5000K
	80W	10,000	0.93	0.42		
Poseidon 8 FT	80W	10,000	0.93	0.42		
	160W	20,000	1.70	0.84		

ORDERING OPTIONS

Series	Length/Wattage	Voltage	Kelvin	Lens
PSN		UNV		F
PSN	4F58W 4' 48W 4F80W 4' 80W 8F80W 8' 80W 8F160W 8' 160W	UNV 120-277V*	40K 4000K 50K 5000K*	F Frosted


OPTIONAL ADD-ONS

Plug Adapter		Emergency Battery Backup	
Blank	None*	Blank	None*
R3	Mini-Receptacle 3-Wire, Male	EM	Emergency Battery Backup

*Standard

EMERGENCY BATTERY BACKUP OPTION

- Minimum 90-Minute Duration
- 8W (4 FT) - 1040 Lumen
- 16W (8 FT) - 2080 Lumen

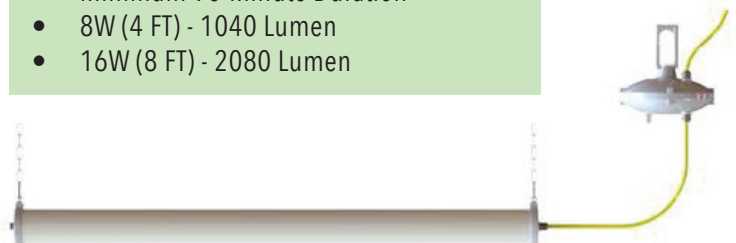

Information provided is subject to change. Please verify all details with FintronX. All values are designed to standard industry values when measured under laboratory conditions, and FintronX makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.